



MULTITOP
MATIC

Αυτόματη ασφάλεια,
χωρίς άλλες ανησυχίες.

MATIC



MULTITOP MATIC

Η πνευματική ηρεμία ζεί εδώ.

Multitop MATIC

είναι το νέο σύστημα κλειδώματος για πόρτες αλουμινίου και σιδερένιες.

Η πόρτα κλειδώνει με ασφάλεια χωρίς να χρησιμοποιείτε τα κλειδιά χάρη στην αυτόματη εμπλοκή των πύλων.



Από μέσα, η πόρτα ανοίγει απλά κατεβάζοντας το πόμολο.



Το εξάρτημα **CISA MOTOR** σας επιτρέπει επίσης να ξεκλειδώσετε την πόρτα από το διαμέρισμά σας.



Άμεση προστασία για το σπίτι, το γραφείο ή το εμπορικό κτίριο.

Το σύστημα Multitop MATIC και το εξάρτημα CISA MOTOR είναι κατάλληλα για:

- κύριες πόρτες εισόδου κατοικιών
- κεντρικές πόρτες εισόδου δημόσιων ή εμπορικών κτιρίων
- δευτερεύουσες πόρτες εισόδου
 - συρόμενες πόρτες



ΚΑΤΟΙΚΙΕΣ



ΕΜΠΟΡΙΚΑ
ΚΤΙΡΙΑ




ALLEGION

"Είναι η μπροστινή πόρτα
κλειδωμένη με ασφάλεια; "
Με το **Multitop MATIC**
αφήνετε τους φόβους σας πίσω.



MULTITOP MATIC

Το **Multitop MATIC** είναι το νέο σύστημα κλειδώματος για πόρτες αλουμινίου και σιδερένιες, που επιτρέπει το ασφαλές κλείδωμα της πόρτας χωρίς τη χρήση κλειδιών.

Η ασφάλεια είναι εγγυημένη με έξι σημεία κλειδώματος και το υψηλότερο επίπεδο των ευρωπαϊκών προτύπων.

Χάρη στο εξάρτημα **CISA MOTOR** είναι επίσης δυνατό να ανοίξετε από απόσταση την πόρτα.



MULTITOP EXIT

Η κλειδαριά **Multitop EXIT** θα είναι σύντομα διαθέσιμη, ένα σύστημα ασφάλισης για πόρτες αλουμινίου και σιδερένιες που σας επιτρέπει να κλειδώνετε την πόρτα με ασφάλεια χωρίς να χρησιμοποιείτε τα κλειδιά σας και να έχετε λειτουργία **anti-panic**.

ΔΙΑΘΕΣΙΜΗ
ΣΥΝΤΟΜΑ!

Multitop MATIC

Τα δυνατά του σημεία είναι τα πλεονεκτήματά σας.



ΑΥΤΟΜΑΤΟ ΚΛΕΙΔΩΜΑ, ΠΑΝΤΑ ΑΣΦΑΛΕΙΑ

Όταν κλείσει η πόρτα, οι 3 πύροι και οι 3 γάντζοι ενεργοποιούνται αυτόματα.

- η πόρτα κλειδώνει με ασφάλεια χωρίς να χρησιμοποιείτε κλειδιά
- η πόρτα είναι πάντα κλειδωμένη σε 6 σημεία
- άνεση και ασφάλεια



3 ΠΥΡΟΙ ΠΑΝΤΟΤΕ ΕΝΕΡΓΟΠΟΙΗΜΕΝΟΙ

Εξασφαλίζουν ερμητικό κλείσιμο της πόρτας: εγγυώνται επίσης την ελεύθερη ολίσθηση των γάντζων χάρη στους πύρους ενισχυμένου πάχους.

- εξοικονόμηση ενέργειας και ακουστική βελτίωση (η πόρτα είναι πάντα τέλεια ευθυγραμμισμένη)
- εγγυημένη απελευθέρωση γάντζων: μόλις οι 3 πύροι έχουν ενεργοποιηθεί, οι γάντζοι είναι ελεύθεροι να μετακινούνται χωρίς να κολλάνε (όταν απελευθερώνονται και αποσύρονται)



ΕΝΑΛΛΑΞΙΜΟΤΗΤΑ ΤΩΝ ΕΣΟΧΩΝ ΣΤΟ ΠΡΟΦΙΛ

Η Multitop MATIC σας επιτρέπει να χρησιμοποιείτε τις εσοχές που υπάρχουν ήδη στα προφίλ για όλες τις κλειδαριές που ανήκουν στην οικογένεια Multitop (PRO και MAX), με εξαίρεση τα προφίλ στα οποία απαιτείται πρόσθετη εργασία στην περιοχή των συρμών του προφίλ αλουμινίου. Το Multitop MATIC σας επιτρέπει επίσης να χρησιμοποιείτε τις ίδιες εσοχές όλων των κλειδαριών στην οικογένεια Multitop.

- οι ίδιες εσοχές χρησιμοποιούνται για όλες τις κλειδαριές της οικογένειας Multitop
- η κλειδαριά μπορεί να επιλεγεί ακόμα και μετά την προετοιμασία των εσοχών στο προφίλ
- μειωμένο απόθεμα



ΛΕΙΤΟΥΡΓΙΑ ΚΛΕΙΔΩΜΑΤΟΣ ΠΟΜΟΛΟΥ

Το ξεκλείδωμα της πόρτας από το εσωτερικό είναι άμεσο απλά κατεβάζοντας το πόμολο. Οι 3 γάντζοι και οι 3 πύροι αποσύρονται ταυτόχρονα. Αυτή η λειτουργία μπορεί να αποκλειστεί στρέφοντας το κλειδί στην κατεύθυνση κλειδώματος της κλειδαριάς.

- Το πόμολο κλειδώνει, εμποδίζοντας το άνοιγμα της πόρτας από μέσα
- απενεργοποίηση του CISA MOTOR, αν έχει εγκατασταθεί το αξεσουάρ
- μεγαλύτερη ασφάλεια κατά των προσπαθειών για αναγκαστική είσοδο από έξω



CISA MOTOR

Ο μηχανισμός CISA MOTOR σας επιτρέπει να ανοίξετε την κλειδαριά Multitop MATIC από μακριά. Αυτό το εξάρτημα μπορεί να εγκατασταθεί κατόπιν αιτήματος και είναι μοναδικό για το όλη την γκάμα των κλειδαριών Multitop MATIC και EXIT.





Με την προσθήκη του εξαρτήματος **CISA MOTOR** στο **Multitop MATIC / EXIT**, η πόρτα μπορεί να ανοίξει ηλεκτρικά από απόσταση.



ΑΠΟΜΑΚΡΥΣΜΕΝΟ ΑΝΟΙΓΜΑ

Ο μηχανισμός CISA MOTOR επιτρέπει το ξεκλείδωμα της κλειδαριάς Multitop MATIC / EXIT από απόσταση ακόμη και όταν η πόρτα είναι ασφαλισμένη με 6 σημεία ασφάλισης.

Το άνοιγμα μπορεί να ενεργοποιηθεί χρησιμοποιώντας οποιοδήποτε ηλεκτρονικό μέσο (ενδοεπικοινωνία, πληκτρολόγιο, αναμεταδότης, κάρτα, τηλέφωνο, κ.λπ.).



ΕΞΑΡΤΗΜΑ ΕΥΚΟΛΗΣ ΤΟΠΟΘΕΤΗΣΗΣ

Ο μηχανισμός CISA MOTOR μπορεί να ενεργοποιήσει όλες τις κλειδαριές στη σειρά Multitop MATIC / EXIT και μπορεί να εγκατασταθεί άμεσα στην πρόσοψη γρήγορα και εύκολα.



ΗΛΕΚΤΡΙΚΗ ΛΕΙΤΟΥΡΓΙΑ ΜΟΝΙΜΟΥ ΑΝΟΙΓΜΑΤΟΣ

Χάρη στον μηχανισμό CISA MOTOR, είναι δυνατό να ενεργοποιηθεί η λειτουργία μόνιμου ανοίγματος (πόρτα πάντα ανοιχτή) σε προκαθορισμένες ώρες της ημέρας.




ΑΚΟΥΣΤΙΚΑ / ΟΠΤΙΚΑ ΣΗΜΑΤΑ

Ο μηχανισμό CISA MOTOR είναι εφοδιασμένος με ηχητικό σήμα και μπορεί να εφοδιαστεί με οπτικό σήμα (κατόπιν αιτήματος) για να δηλώσει την κατάσταση που βρίσκεται (ανοιχτή ή κλειστή).

μέσα ανοίγματος



ενδοεπικοινωνία πληκτρολόγιο αναμεταδότης κάρτα τηλέφωνο

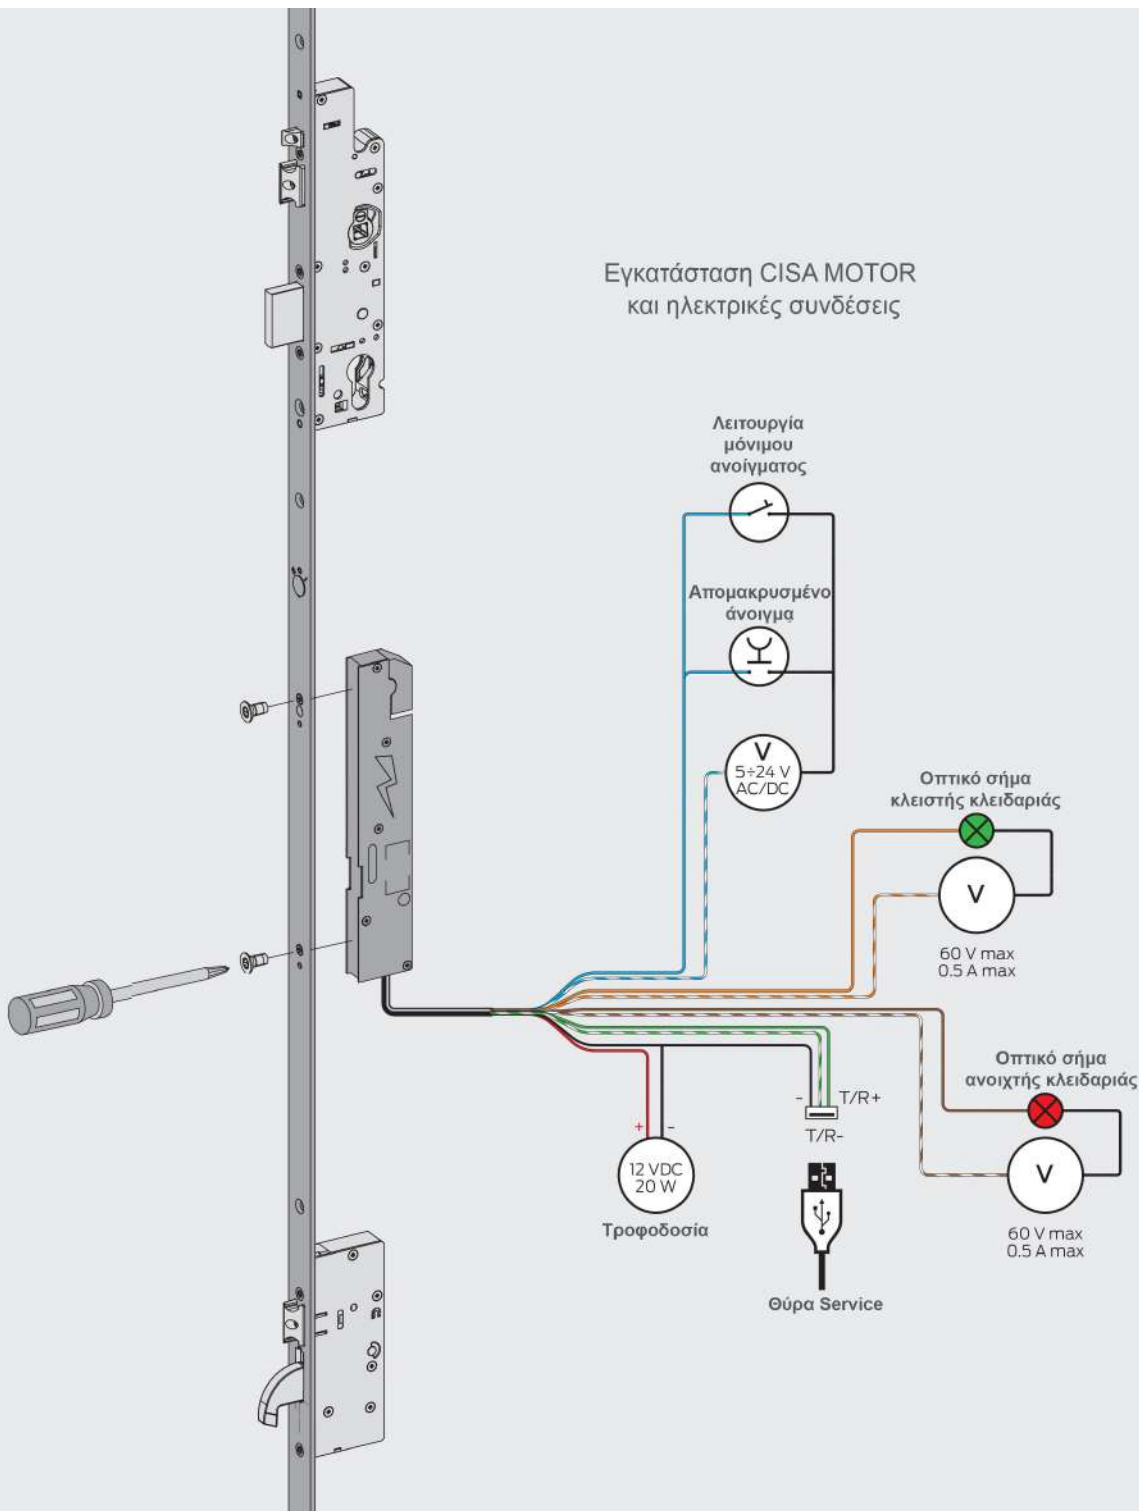

TYPE	DESCRIPTION	LOCKING POINTS	THROWS	CENTRE DISTANCE	FACEPLATE	BACKSET	kg		ITEM		
							LIMIT WEIGHT	PCS	TYPE	DIM.	HAND



- **"Flat" adjustable faceplate 24 x 3 mm.**
In stainless steel, 2300 mm high.
- top adjustment 350 mm.
- lower adjustment 150 mm.
- 10 to 16 mm adjustable central lock deadlocking latchbolt.
- 9 to 15 mm adjustable lateral locking point 2 latchbolts.
- 9 to 15 mm adjustable "automatic reset" sensor.
- 2 hooks in hardened steel.
- SUPPLIED AS STANDARD
- pair of nylon roses item 1.06012.01.0
- lock and cylinder fixing screws
- instruction sheet
- ON REQUEST
- **CISA MOTOR item 1.E0000.00.0**
- Hold open device item 1.06120.00.0
- Top extension bolt kit for doors up to 3000 mm item 1.06444.96.0
- Cylinder protective rose item 1.06460.05.0
- Drill resistant plates for grade 7 pr EN 15685:14 item 1.06436.12/13.0

6	1	85	24	35	3,640	1	1	4A000	35	0
6	1	85	24	40	3,700	1	1	4A000	40	0
6	1	85	24	45	4,300	1	1	4A000	45	0
6	1	92	24	35	3,640	1	1	4A010	35	0
6	1	92	24	40	3,700	1	1	4A010	40	0
6	1	92	24	45	4,300	1	1	4A010	45	0

TYPE	DESCRIPTION	LOCKING POINTS	THROWS	CENTRE DISTANCE	FACEPLATE	BACKSET	kg		ITEM		
							LIMIT WEIGHT	PCS	TYPE	DIM.	HAND



- **U-shaped adjustable faceplate 24 x 5 mm.**
In stainless steel, 2300 mm high.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 10 to 16 mm adjustable central lock deadlocking latchbolt.
- 9 to 15 mm adjustable lateral locking point 2 latchbolts.
- 9 to 15 mm adjustable "automatic reset" sensor.
- 2 hooks in hardened steel.
- SUPPLIED AS STANDARD
- pair of nylon roses item 1.06012.01.0
- lock and cylinder fixing screws
- instruction sheet
- ON REQUEST
- **CISA MOTOR item 1.E0000.00.0**
- Hold open device item 1.06120.00.0
- Top extension bolt kit for doors up to 3000 mm item 1.06444.86.0
- Cylinder protective rose item 1.06460.05.0
- Protective plates item 1.06436.10/11.0
- **U-shaped adjustable faceplate 24 x 7 mm.**
In stainless steel, 2300 mm high.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 10 to 16 mm adjustable central lock deadlocking latchbolt.
- 9 to 15 mm adjustable lateral locking point 2 latchbolts.
- 9 to 15 mm adjustable "automatic reset" sensor.
- 2 hooks in hardened steel.
- SUPPLIED AS STANDARD
- pair of nylon roses item 1.06012.01.0
- lock and cylinder fixing screws
- instruction sheet
- ON REQUEST
- **CISA MOTOR item 1.E0000.00.0**
- Hold open device item 1.06120.00.0
- Top extension bolt kit for doors up to 3000 mm item 1.06444.87.0
- Cylinder protective rose item 1.06460.05.0
- Drill resistant plates for grade 7 pr EN 15685:14 item 1.06436.10/11.0

6	1	85	24	35	3,640	1	1	4A100	35	0
6	1	85	24	40	3,700	1	1	4A100	40	0
6	1	85	24	45	4,300	1	1	4A100	45	0
6	1	92	24	35	3,640	1	1	4A110	35	0
6	1	92	24	40	3,700	1	1	4A110	40	0
6	1	92	24	45	4,300	1	1	4A110	45	0
6	1	85	24	35	3,640	1	1	4A200	35	0
6	1	85	24	40	3,700	1	1	4A200	40	0
6	1	85	24	45	4,300	1	1	4A200	45	0
6	1	92	24	35	3,640	1	1	4A210	35	0
6	1	92	24	40	3,700	1	1	4A210	40	0
6	1	92	24	45	4,300	1	1	4A210	45	0







MATCHING ADJUSTABLE METAL STRIKERS			
CURRENT STRIKERS		NEW STRIKERS	
Central lock item	Lateral locking points (2pcs) item	Central lock item	Lateral locking points (2pcs) item
1.06463.05.0	1.06465.05.0		
1.06463.16.0	1.06465.06.0		
1.06463.17.0 to be discontinued	1.06465.07.0 to be discontinued	replaced by 1.06463.67/68.0	replaced by 1.06465.57/58.0
1.06463.31.0 to be discontinued	1.06465.21.0 to be discontinued	replaced by 1.06463.67/68.0	replaced by 1.06465.57/58.0
1.06463.32.0 to be discontinued	1.06465.22.0 to be discontinued	replaced by 1.06463.82.0	replaced by 1.06465.72.0
1.06463.33.0 to be discontinued	1.06465.23.0 to be discontinued	replaced by 1.06463.83.0	replaced by 1.06465.73.0
1.06463.34.0 to be discontinued	1.06465.24.0 to be discontinued	replaced by 1.06463.84.0	replaced by 1.06465.74.0
1.06463.35.0 to be discontinued	1.06465.25.0 to be discontinued	replaced by 1.06463.85.0	replaced by 1.06465.75.0
1.06461.07.0	1.06461.12.0		
1.06461.17.0	1.06461.22.0		
1.06461.30.0	1.06461.34.0		
1.06461.35.0	1.06461.39.0		





MATCHING ADJUSTABLE METAL STRIKERS			
CURRENT STRIKERS		NEW STRIKERS	
Central lock item	Lateral locking points (2pcs) item	Central lock item	Lateral locking points (2pcs) item
1.06463.05.0	1.06465.05.0		
1.06463.16.0	1.06465.06.0		
1.06463.17.0 to be discontinued	1.06465.07.0 to be discontinued	replaced by 1.06463.67/68.0	replaced by 1.06465.57/58.0
1.06463.31.0 to be discontinued	1.06465.21.0 to be discontinued	replaced by 1.06463.67/68.0	replaced by 1.06465.57/58.0
1.06463.32.0 to be discontinued	1.06465.22.0 to be discontinued	replaced by 1.06463.82.0	replaced by 1.06465.72.0
1.06463.33.0 to be discontinued	1.06465.23.0 to be discontinued	replaced by 1.06463.83.0	replaced by 1.06465.73.0
1.06463.34.0 to be discontinued	1.06465.24.0 to be discontinued	replaced by 1.06463.84.0	replaced by 1.06465.74.0
1.06463.35.0 to be discontinued	1.06465.25.0 to be discontinued	replaced by 1.06463.85.0	replaced by 1.06465.75.0
1.06461.07.0	1.06461.12.0		
1.06461.17.0	1.06461.22.0		
1.06461.30.0	1.06461.34.0		
1.06461.35.0	1.06461.39.0		

TYPE	DESCRIPTION	FOR SERIES/ ITEM	FACEPLATE	FACEPLATE		ITEM				
				kg	PCS	TYPE	DIM.	HAND		
	<ul style="list-style-type: none"> CISA MOTOR for installation on all multipoint Multitop MATIC locks. It allows remote electric opening <ul style="list-style-type: none"> - CE 12V DC voltage - Absorbed current ZA SUPPLIED AS STANDARD <ul style="list-style-type: none"> - power supply cable art. 1.07030.40.0 - 2 fixing screws - instruction sheet 	4A010, 4A100, 4A110, 4A200, 4A210	-	0,500	1	1	E0000	00	0	
	<ul style="list-style-type: none"> Concealed cable guard. 			0,058	6	1	06515	00	0	
	<ul style="list-style-type: none"> Concealed cable guard. 			0,325	6	1	06515	15	0	
	<ul style="list-style-type: none"> External cable guard with spring (L=300). 			0,100	10	1	06515	20	0	
	<ul style="list-style-type: none"> External cable guard with spring (L=600). 			0,100	10	1	06515	21	0	
	<ul style="list-style-type: none"> Red LED. 			0,005	1	1	07126	01	0	
	<ul style="list-style-type: none"> Green LED. 			0,019	1	1	07126	02	0	
	<ul style="list-style-type: none"> Cabled keypad for individual access control by PIN code, for E0000 series CISA MOTOR. Polished black finish. AVAILABLE FINISHES <ul style="list-style-type: none"> - Satin finished chrome (fin. B1) 	E0000	-	0,500	1	1	06525	77	0	
	<ul style="list-style-type: none"> Power supply cable. 			0,019	1	1	07030	40	0	
	<ul style="list-style-type: none"> Service cable. 			0,019	1	1	07030	41	0	
	<ul style="list-style-type: none"> 12V DC power supply. 			-	0,250	1	1	07060	10	0

TYPE	DESCRIPTION	LOCKING POINTS	THROWS	CENTRE DISTANCE	FACEPLATE	BACKSET	FACEPLATE		ITEM			
							kg	PCS	TYPE	DIM.	HAND	
	<ul style="list-style-type: none"> Stainless steel faceplate 24 x 3 mm. Deadbolt and latch bolt 10 to 16 mm adjustable deadlocking latchbolt. 9 to 15 mm adjustable "automatic reset" sensor. SUPPLIED AS STANDARD <ul style="list-style-type: none"> - pair of nylon roses item 1.06012.01.0 - lock and cylinder fixing screws - instruction sheet ON REQUEST <ul style="list-style-type: none"> - Cylinder protective rose item 1.06460.05.0 	1	2	85	24	35	1,130	1	1	4A300	35	0
		1	2	85	24	40	1,190	1	1	4A300	40	0
		1	2	85	24	45	1,790	1	1	4A300	45	0
		3	2	92	24	35	3,640	1	1	4A310	35	0
		3	2	92	24	40	3,700	1	1	4A310	40	0
		3	2	92	24	45	4,300	1	1	4A310	45	0

MATCHING ADJUSTABLE METAL STRIKERS	
CURRENT STRIKERS	NEW STRIKERS
1.06463.05.0	
1.06463.16.0	
1.06463.17.0 to be discontinued	replaced by 1.06463.67/68.0
1.06463.31.0 to be discontinued	replaced by 1.06463.67/68.0
1.06463.32.0 to be discontinued	replaced by 1.06463.82.0
1.06463.33.0 to be discontinued	replaced by 1.06463.83.0
1.06463.34.0 to be discontinued	replaced by 1.06463.84.0
1.06463.35.0 to be discontinued	replaced by 1.06463.85.0
1.06461.07.0	
1.06461.17.0	
1.06461.30.0	
1.06461.35.0	

TYPE	DESCRIPTION	FOR SERIES/ ITEM	FACEPLATE	kg	PCS	ITEM			
						UNIT WEIGHT	TYPE	DIM.	HAND
	<ul style="list-style-type: none"> Hold open device for 4A000 series Multitop MATIC locks, 2 different modes: <ul style="list-style-type: none"> - hold open (withdrawn latchbolts and deadbolts); - semi-automatic function (only with withdrawn deadbolts). 	4A010, 4A100, 4A110, 4A200, 4A210	-	0,020	1	1	06120	00	0
	<ul style="list-style-type: none"> Top extension bolt kit for doors up to 3000 mm. U-shaped adjustable faceplate 24 x 5 mm in STAINLESS steel, 700 mm high. 	4A100, 4A110	24	0,900	1	1	06444	86	0
	<ul style="list-style-type: none"> Top extension bolt kit for doors up to 3000 mm. U-shaped adjustable faceplate 24 x 7 mm in STAINLESS steel, 700 mm high. 	4A200, 4A210	24	0,900	1	1	06444	87	0
	<ul style="list-style-type: none"> Top extension bolt kit for doors up to 3000 mm. "Flat" adjustable faceplate 24 x 3 mm in STAINLESS steel, 700 mm high. 	4A000, 4A010	24	0,900	1	1	06444	96	0
	<ul style="list-style-type: none"> Lock protective plate, to increase drill resistance (grade 7 prEN 15685: 14). 	4A000, 4A010, 4A100, 4A110, 4A200, 4A210	0,100	6	1	06436	12	0	
	<ul style="list-style-type: none"> Protective plate for lateral locking points, to increase drill resistance (grade 7 prEN 15685: 14). 	4A000, 4A010, 4A100, 4A110, 4A200, 4A210	0,057	12	1	06436	13	0	


TYPE	DESCRIPTION	FOR SERIES/ ITEM	FACEPLATE	kg	PCS	ITEM		
						UNIT WEIGHT	TYPE	DIM.
	<ul style="list-style-type: none"> Microswitch for deadbolt status to be used with lateral locking points. 		0,020	1	1	06195	08	0
	<ul style="list-style-type: none"> Protective rose for cylinders RS3, ASTRAL, AP3 (with long key, CL special execution), AP4 and ASIX, in chrome-plate carbonitrided steel for 49000 series, complete with: <ul style="list-style-type: none"> - spacers 2 mm (19 pcs), 1 mm (2 pcs); - M5 x 75mm screws; - inside escutcheon. AVAILABLE FINISHES: <ul style="list-style-type: none"> - Gold polished steel (fin. 15) ON REQUEST <ul style="list-style-type: none"> - Pair of additional spacers for 65 to 87 mm wide profiles item 1.06141.87.0 		0,485	1	1	06460	05	0
	<ul style="list-style-type: none"> Nylon cover for thermal cut aluminium profiles for outward opening doors (7.5 to 10 mm lip height). 		0,019	25	1	06141	79	0
	<ul style="list-style-type: none"> Nylon cover for thermal cut aluminium profiles for outward opening doors (3 to 7.5 mm lip height). 		0,019	25	1	06141	89	0

MULTITOP MATIC

SECURITY AND CERTIFICATIONS

The lock is certified to the highest grades of the European Standards prEN15685:14 (mechanical) and EN14846:08 (mechanical + CISA MOTOR) and is suitable for doors certified to EN1627:11 up to resistance class WK/RC 4.

 Resistance to burglary is 1,000 kg lateral force and 600 kg attempt to break the profile.

 The 2 hardened steel hooks are independent of each other and of the central lock mechanism: if one of the deadbolts or hooks is forced, the other locking points remain securely engaged.

OTHER FUNCTIONS

With only one accessory installed (item 1.06120.00.0), the Multitop MATIC lock can have two additional locking functions:

 **Door locked with only the latchbolts engaged** function (semi-automatic) can be activated directly on the lock faceplate: the deadbolts are deactivated and the door remains locked with only the 3 latchbolts engaged.

 **Doors always open** function (hold open) can be activated directly on the lock faceplate: the deadbolts and the latchbolts never engage.

MULTITOP EXIT

AVAILABLE
SOON!

The **Multitop EXIT** lock will soon be available.

The door is always securely locked at 6 locking points without having to use your keys: two independent hooks on the lateral locking points and one central deadbolt, in addition to the three latchbolts. The door can always be opened from the inside using the handle or panic exit device, despite the secure locking system. Suitable for both single and double doors. In the latter case, a secondary lock must be used.

The features and benefits will be the same as those of the Multitop MATIC with the exception of the handle lock function as the handle or the panic exit device must always be active as required by current regulations.

When the CISA MOTOR accessory is used, it will always be possible to open the door remotely with an electrical impulse through a button.

MULTITOP MATIC

MULTITOP MATIC

Technical features

- Case thickness 15.5 mm
- Closed case
- Backsets 35/-40/-45 mm
- Centre distance 85 and 92 mm
- Case in zinc-plated pressure die-cast metal
- Zinc-plated steel cover
- Stainless steel top and bottom adjustable faceplate
- 10 to 16 mm adjustable central lock deadlocking latchbolt
- 9 to 15 mm adjustable lateral locking point 2 latchbolts
- 9 to 15 mm adjustable "automatic reset" sensor
- Central deadbolt with 20 mm protrusion
- 8 mm thick lateral locking point hooks with 25 mm protrusion in hardened steel
- 16 mm hooks
- Protective plate for grade 7 item 1.06436.12/13.0
- Pre-set for installation of microswitch on the lateral locking point cases
- 8 mm square spindle
- DIN holes to fix the handle plate
- Non-handed

Supplied as standard

- Pair of nylon roses item 1.06012.01.0
- Lock and cylinder fixing screws
- Instructions sheet

On request

- CISA MOTOR accessory for motorised opening (item 1.E0000.00.0)
- Hold open device / semi-automatic function (item 1.06120.00.0)
- Euro profile cylinder
- Adjustable metal strikers (see special vademecum)
- Cylinder protective rose item 1.06460.05.0
- Top extension bolt kit 1.06444.86/87/96.0

Certifications

- Grade 6 Security to prEN15685:14 (mechanical) and EN14846:08 (mechanical + CISA MOTOR)
- Grade 7 Security to prEN15685:14 (mechanical) and EN14846:08 (mechanical + CISA MOTOR) using protective plates for the lock and the lateral locking points item 06436
- Suitable for doors certified to EN1627:11 up to resistance class WK/RC4



CISA MOTOR

Technical features


- Case thickness 15.5 mm
- CE 12V DC voltage
- Absorbed current 2A
- Sound signal to indicate open or closed status (deadbolt status)
- Sound signal to indicate any installation error (see user manual for further details)
- Optional light signal (see special accessories)

- Possibility to customise the time during which the motor remains active during the opening, connecting to the PC with a USB cable (factory set at 3 seconds)
- If the "handle lock" function is activated, the motor is automatically switched off
- In the event of a power failure, it is still possible to open the door with the keys




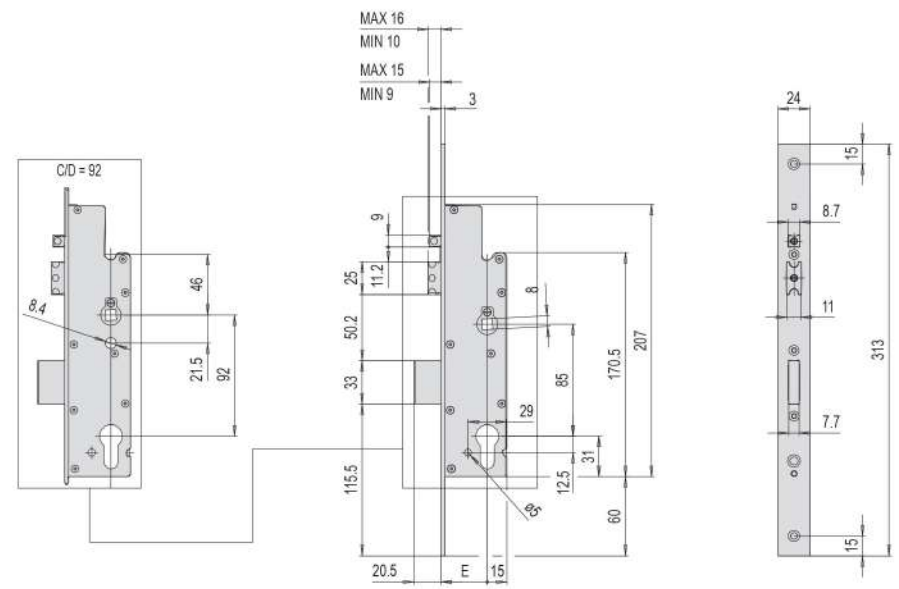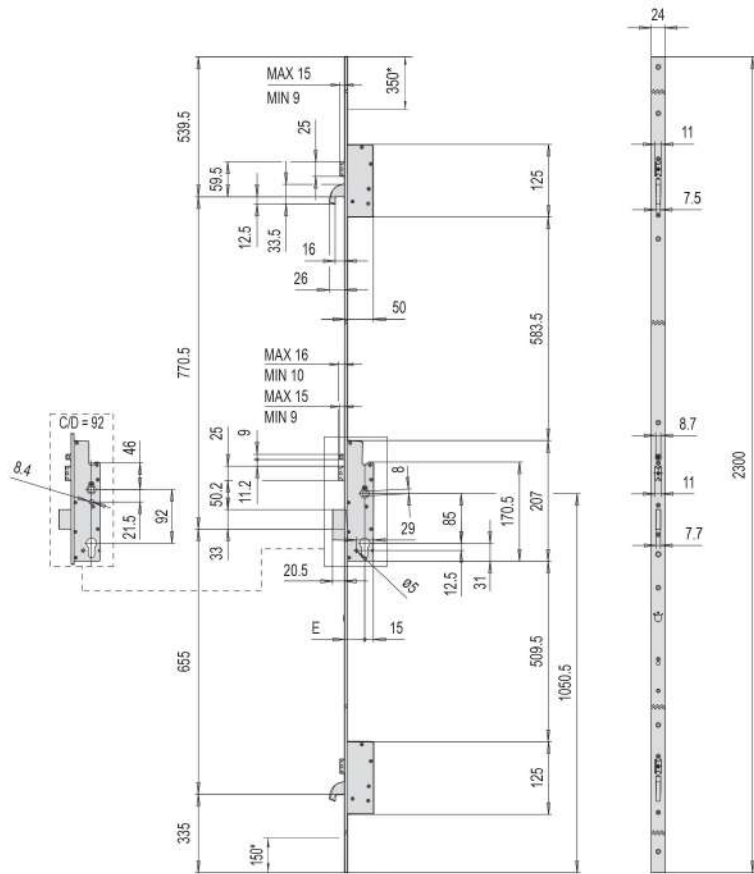

4A020 l = 85
4A010 l = 92

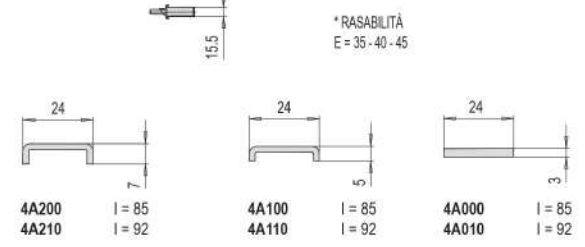

*RASABILITÀ
E = 35 - 40 - 45

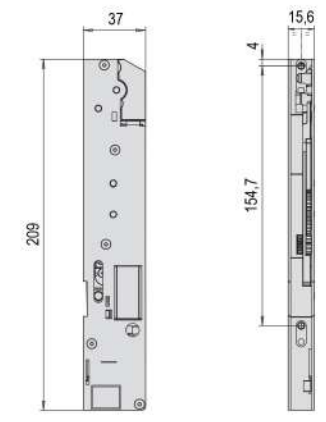



Learn more


CISA


CISA

 MULTITOP
MATIC
SECURE, COMFORTABLE,
PRACTICAL.

 MOTOR
CISA
SECURE FLEXIBILITY
AND EVOLUTION.

By using Multitop MATIC with the CISA MOTOR,
the lock can be motorised.
The door can be opened **remotely**
even when it is securely locked in six points.

remote opening



opening credentials



intercom



keypad



transponder



card



smartphone

About Allegion™

Allegion (NYSE: ALLE) is a global pioneer in seamless access, with leading brands like CISA®, Interflex®, LCN®, Schlage®, SimonsVoss® and Von Duprin®. Focusing on security around the door and adjacent areas, Allegion secures people and assets with a range of solutions for homes, businesses, schools and institutions. Allegion had \$2.7 billion in revenue in 2018, and sells products in almost 130 countries.

For more, visit allegion.com.



 CISA SpA
Via Oberdan 42
48018 Faenza (RA) Italy

 Ph. +39 0546 677111
Fax +39 0546 677150

 Customer Service and Technical Support
+39 0546 188 0070

   cisa.com
cisa.sales@allegion.com